


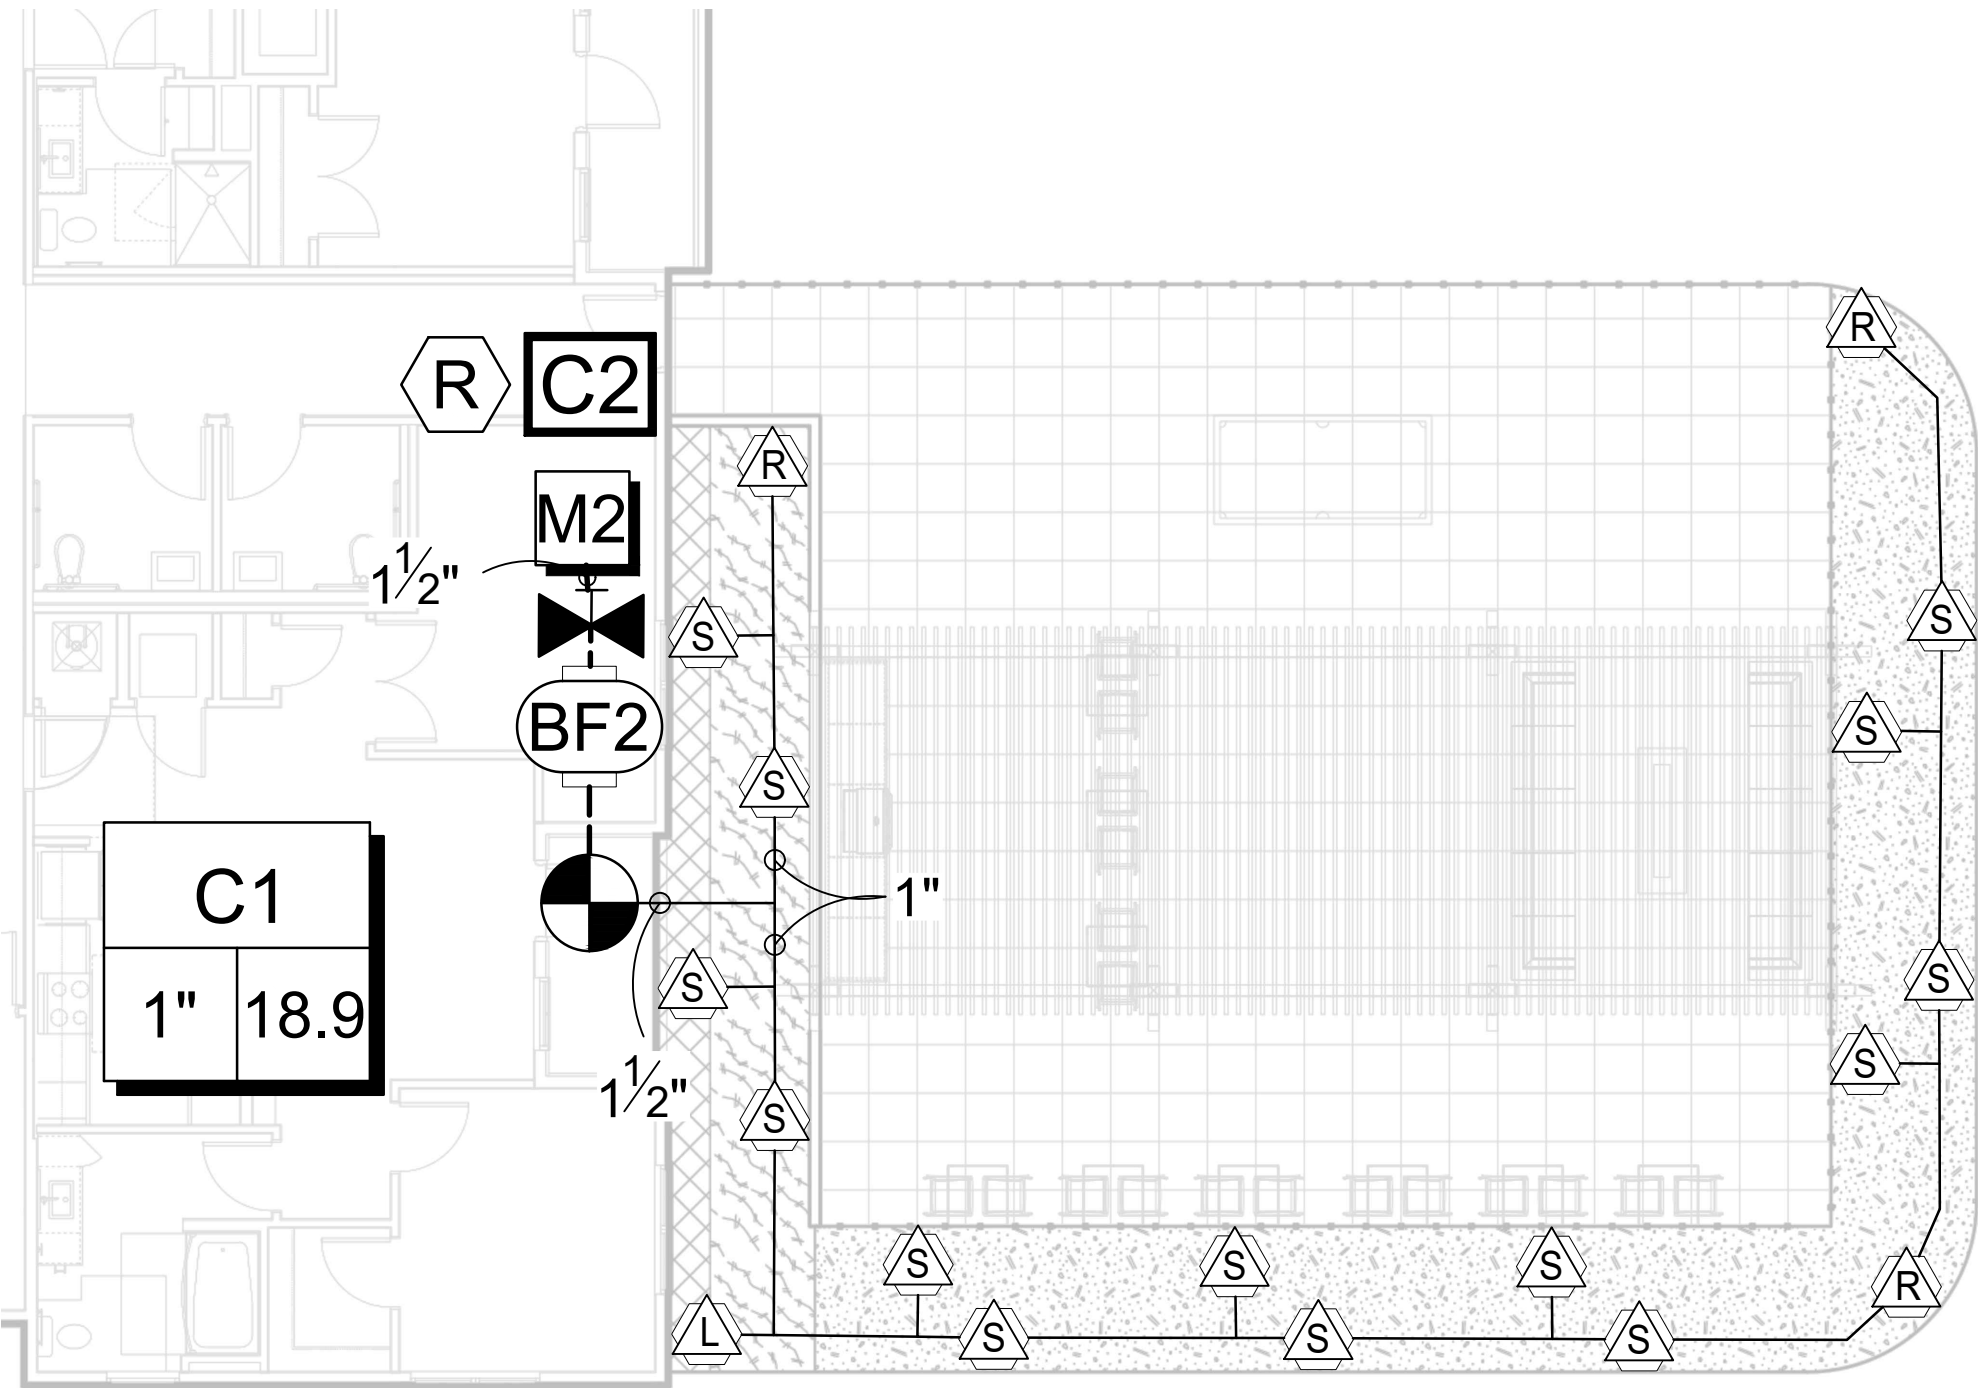

IRRIGATION SCHEDULE (FOURTH FLOOR ROOF DECK)

SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird 1812 15LCS	1
	Rain Bird 1812 15RCS	3
	Rain Bird 1812 15SST	14
SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird PGA Globe 1"	1
	Nibco T-113 1 1/2"	1
	Febco 850 1"	1
	Rain Bird ESP4ME3	1
	Rain Bird WR2-RFC	1
	Water Meter 1"	1
	Irrigation Lateral Line: PVC Class 200 SDR 21 1"	169.8 lf
	Irrigation Lateral Line: PVC Class 200 SDR 21 1 1/2"	7.7 lf
	Irrigation Mainline: PVC Class 200 SDR 21 1 1/2"	16.0 lf
Valve Callout		
	Valve Number	
	Valve Flow	
	Valve Size	

CRITICAL ANALYSIS

P.O.C. NUMBER: 01	
Water Source Information:	
FLOW AVAILABLE	
Water Meter Size:	1"
Flow Available	37.5 GPM
PRESSURE AVAILABLE	
Static Pressure at POC:	50 PSI
Elevation Change:	5.00 ft
Service Line Size:	2"
Length of Service Line:	20 ft
Pressure Available:	48 PSI
DESIGN ANALYSIS	
Maximum Station Flow:	18.9 GPM
Flow Available at POC:	37.5 GPM
Residual Flow Available:	18.6 GPM
Design Pressure:	30 PSI
Friction Loss:	1.25 PSI
Fittings Loss:	0.13 PSI
Elevation Loss:	0 PSI
Loss through Valve:	5.99 PSI
Pressure Req. at Critical Station:	37.4 PSI
Loss for Fittings:	0.01 PSI
Loss for Main Line:	0.12 PSI
Loss for POC to Valve Elevation:	0 PSI
Loss for Backflow:	7.16 PSI
Loss for Water Meter:	1.98 PSI
Critical Station Pressure at POC:	46.6 PSI
Pressure Available:	48 PSI
Residual Pressure Available:	1.37 PSI

IRRIGATION SPECIFICATIONS


- IRRIGATION SYSTEM DESIGN BASED ON 25 GPM AT 70 PSI.
- IRRIGATION DESIGN IS FROM THE POINT OF CONNECTION(POC)ONLY. THE DESIGN IS BASED ON GALLONS PER MINUTE(GPM)AND POUNDS PER SQUARE INCH(Psi)FURNISHED BY OTHERS.
- IRRIGATION CONTRACTOR IS TO VERIFY POINT OF CONNECTION IN THE FIELD. INSTALLER IS TO CONFIRM THE MINIMUM DISCHARGE REQUIREMENTS OF THE POINT OF CONNECTION AS INDICATED ON THE LEGEND PRIOR TO INSTALLATION.
- THE PRESSURE REQUIREMENT AT THE POINT OF CONNECTION IS BASED ON NO MORE THAN 5 FEET OF ELEVATION CHANGE IN THE AREAS OF IRRIGATION.
- ALL PRODUCTS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND ACCORDING TO LOCAL BUILDING, ELECTRICAL, AND PLUMBING CODES.
- IRRIGATION CONTRACTOR WILL ARRANGE INSPECTIONS REQUIRED BY LOCAL AGENCIES AND ORDINANCES DURING THE COURSE OF CONSTRUCTION AS REQUIRED. ALL WIRING TO BE PER LOCAL CODE. BACKFLOW PREVENTION TO BE PER LOCAL CO
- LOCATION OF IRRIGATION COMPONENTS SHOWN ON DRAWING IS APPROXIMATE. ACT PLACEMENT MAY VERY SLIGHTLY AS REQUIRED TO ACHIEVE FULL, EVEN COVERAGE.
- ALL SPRINKLER HEADS SHALL BE INSTALLED PERPENDICULAR TO FINISH GRADES. EXCEPT AS OTHERWISE INDICATED.
- INSTALL IRRIGATION MAINS WITH A MINIMUM 18" OF COVER BASED ON FINISH GRAD INSTALL IRRIGATION LATERALS WITH MINIMUM 12" OF COVER BASED ON FINISH GRAD
- PIPE LOCATIONS ARE DIAGRAMATIC. VALVES AND MAINLINE SHOWN IN PAVED AREA ARE FOR GRAPHIC CLARITY ONLY.
- THE IRRIGATION CONTRACTOR SHALL COMPLY WITH PIPE SIZES AS INDICATED.
- ALL WIRE SPLICES OR CONNECTIONS SHALL BE MADE WITH APPROVED WATERPROOF WIRE CONNECTIONS AND BE IN A VALVE OR SPLICE BOX.
- ALL CONTROLLER/DECODER WIRE SHALL BE THE SINGLE STRAND SPECIFIED BY THE CONTROLLER MANUFACTURER

VALVE SCHEDULE (FOURTH FLOOR ROOF DECK)

NUMBER	MODEL	SIZE	TYPE	GPM	WIRE	VALVE LOSS	PSI	PSI @ POC	PRECIP
C1	Rain Bird PGA Globe Common Wire	1"	Shrub Spray	18.9	23.6 16.0	5.99	37.4	46.6	2.11 in/h

WATERING SCHEDULE (FOURTH FLOOR ROOF DECK)

NUMBER	MODEL	TYPE	PRECIP	SUN	MON	TUE	WED	THU	FRI	SAT	IN./WEEK	MIN./WEEK	GAL./WEEK	GAL./DAY
C1	Rain Bird PGA Globe	Shrub Spray	2.11 in/h	5 min	5 min	5 min	5 min	5 min	5 min	5 min	1	29	548	78.3
TOTALS:				5	5	5	5	5	5	5		29	548.1	78.3

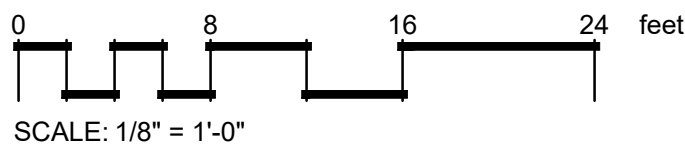

Project Name:

THE GRAND ON MAIN
WEST FIELD, INDIANA

Customer Name:

Design Date: 14-04-26

Drawn By: TOM

REVISIONS

Description	Date

Drawing Scale: 1" = 8'


Project Services Number: XXXX

Drawing Title:

IRRIGATION PLAN

Sheet Number:

IR-1

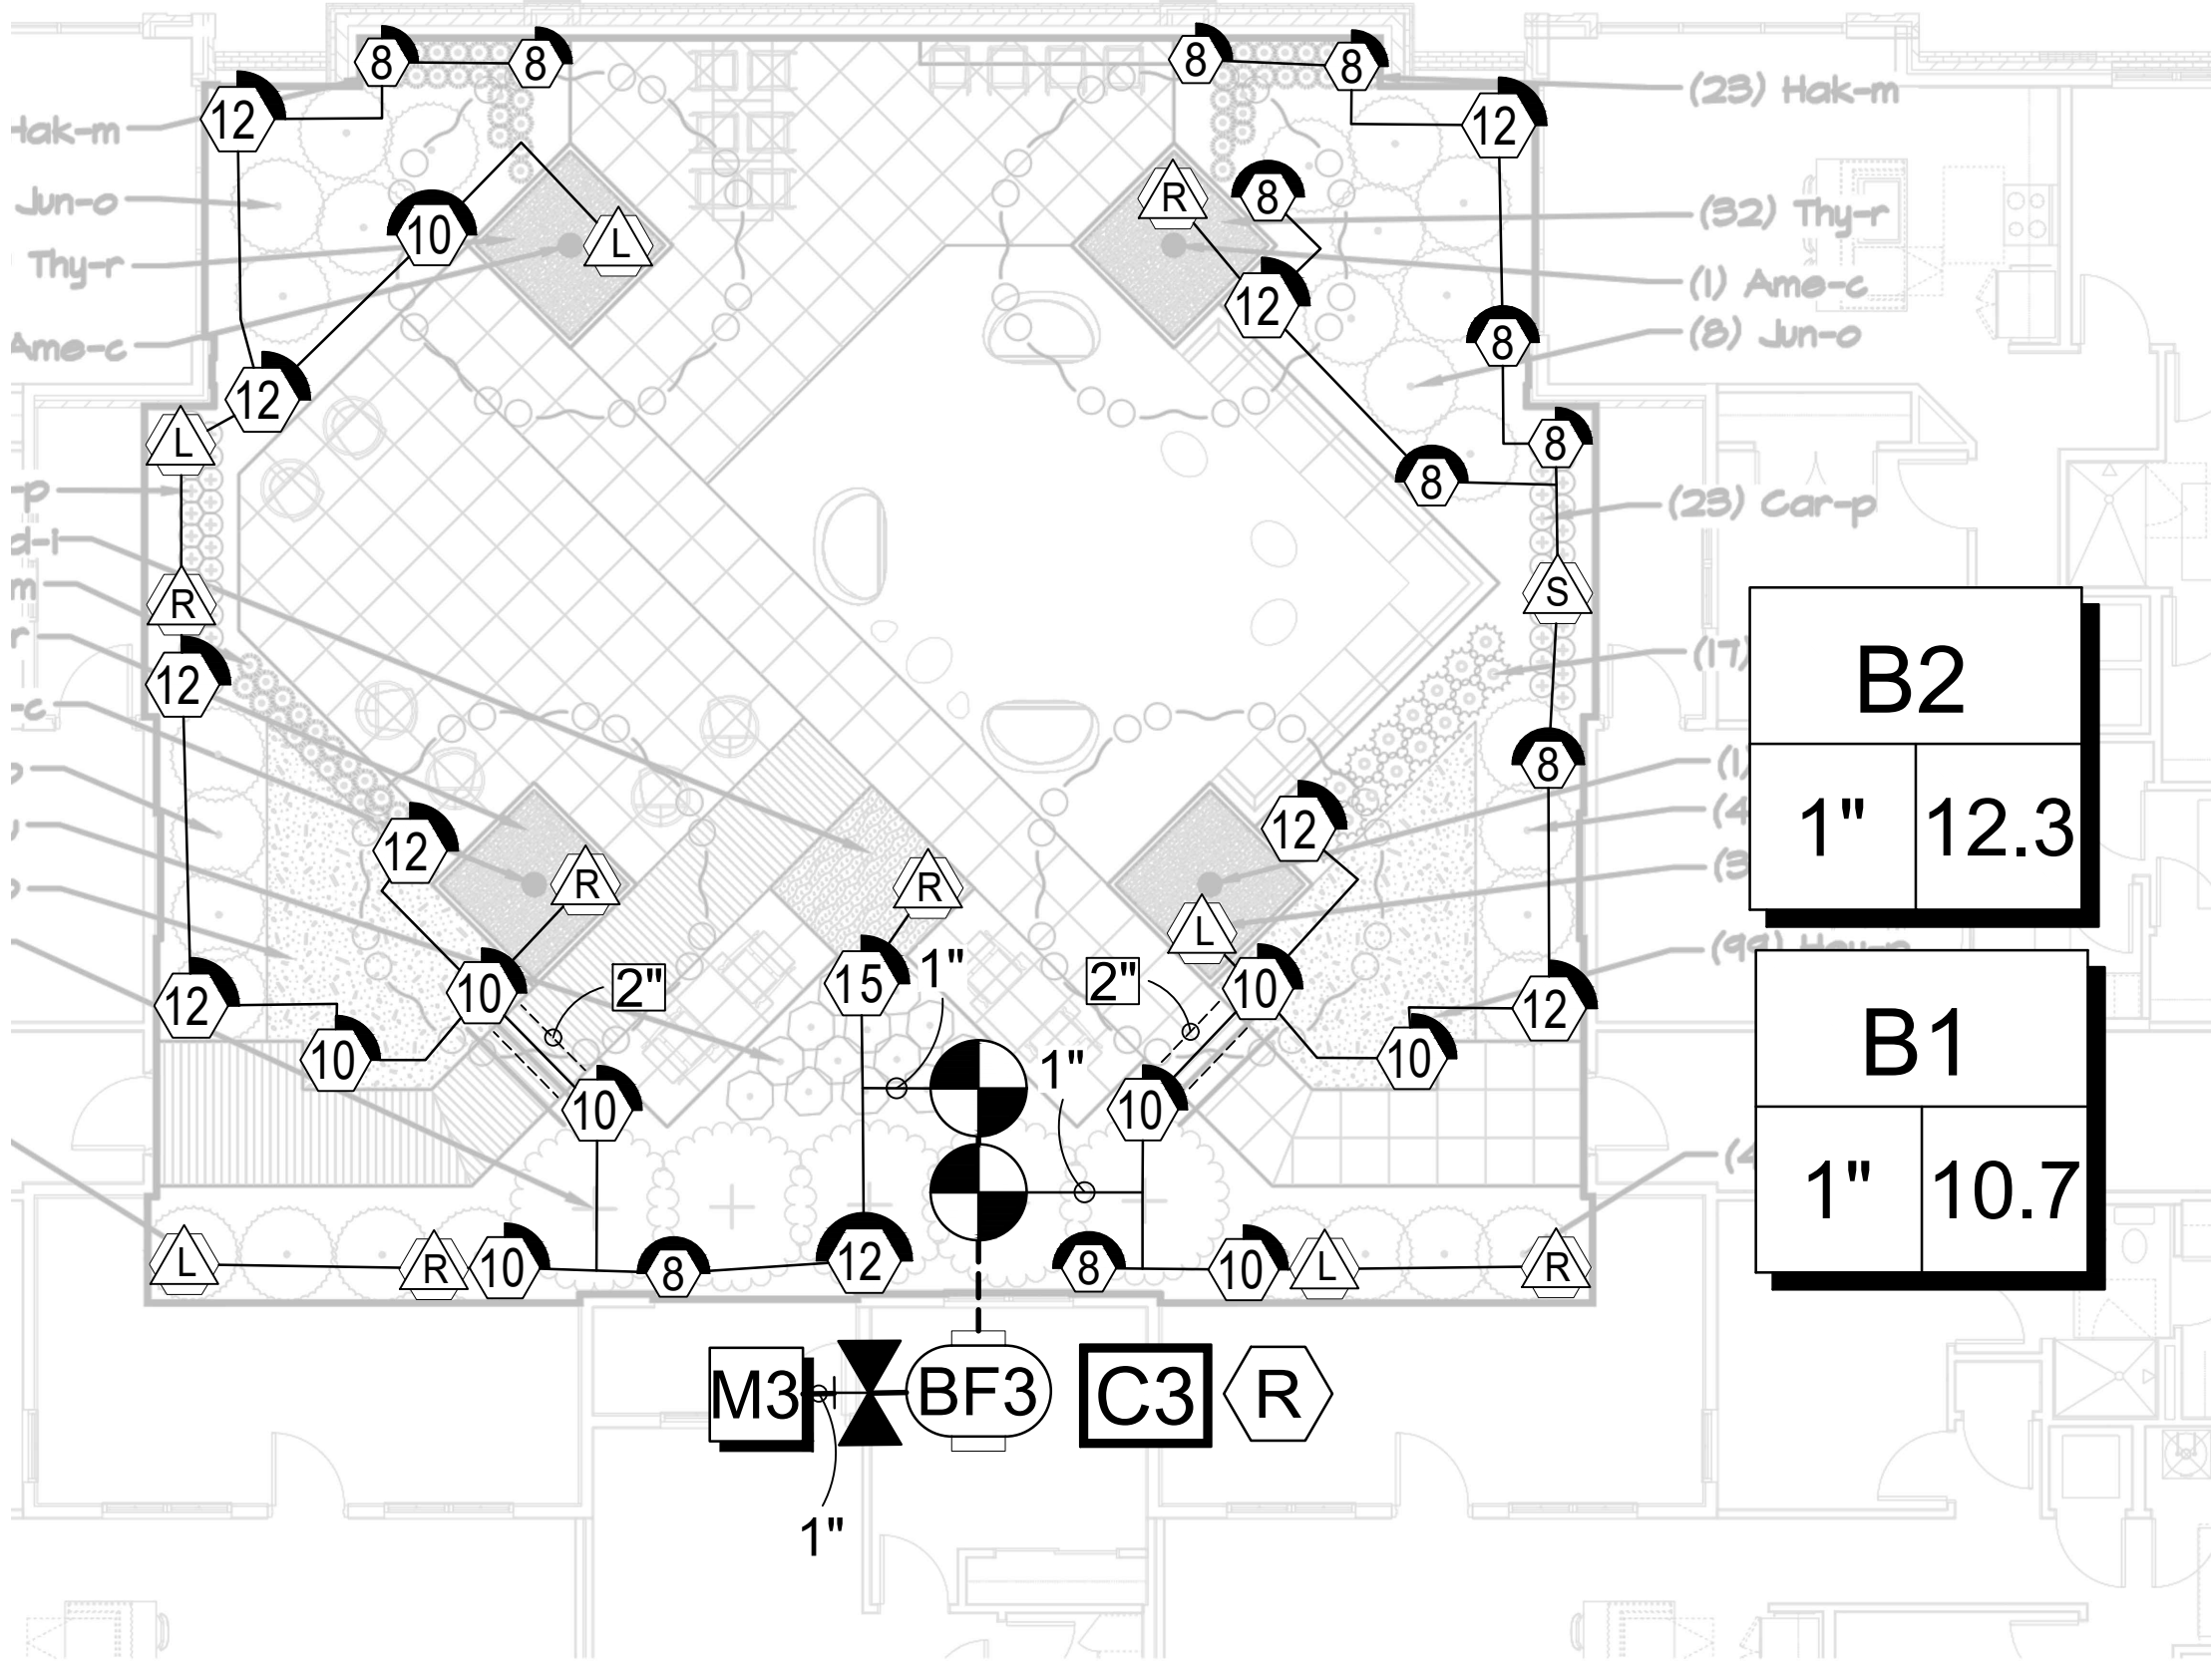

IRRIGATION SCHEDULE (SECOND FLOOR WEST ROOF DECK)

SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird 1812 15LCS	5
	Rain Bird 1812 15RCS	6
	Rain Bird 1812 15SST	1
	Rain Bird 1812 08H	6
	Rain Bird 1812 08Q	5
	Rain Bird 1812 10H	1
	Rain Bird 1812 10Q	8
	Rain Bird 1812 12H	1
	Rain Bird 1812 12Q	9
	Rain Bird 1812 15Q	1
SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird PGA Globe 1"	2
	Nibco T-113 1"	1
	Febco 850 1"	1
	Rain Bird ESP4ME3	1
	Rain Bird WR2-RFC	1
	Water Meter 1"	1
	Irrigation Lateral Line: PVC Class 200 SDR 21 1"	366.0 lf
	Irrigation Mainline: PVC Class 200 SDR 21 1"	21.9 lf
	Pipe Sleeve: PVC Schedule 40 2"	7.3 lf
Valve Callout		
	Valve Number	
	Valve Flow	
	Valve Size	

CRITICAL ANALYSIS

P.O.C. NUMBER: 01	
Water Source Information:	
FLOW AVAILABLE	
Water Meter Size:	1"
Flow Available	37.5 GPM
PRESSURE AVAILABLE	
Static Pressure at POC:	50 PSI
Elevation Change:	5.00 ft
Service Line Size:	2"
Length of Service Line:	20 ft
Pressure Available:	48 PSI
DESIGN ANALYSIS	
Maximum Station Flow:	12.29 GPM
Flow Available at POC:	37.5 GPM
Residual Flow Available:	25.21 GPM
Design Pressure:	30 PSI
Friction Loss:	0.68 PSI
Fittings Loss:	0.07 PSI
Elevation Loss:	0 PSI
Loss through Valve:	5.92 PSI
Pressure Req. at Critical Station:	36.7 PSI
Loss for Fittings:	0.05 PSI
Loss for Main Line:	0.45 PSI
Loss for POC to Valve Elevation:	0 PSI
Loss for Backflow:	6.89 PSI
Loss for Water Meter:	0.93 PSI
Critical Station Pressure at POC:	45.0 PSI
Pressure Available:	48 PSI
Residual Pressure Available:	3.0 PSI

IRRIGATION SPECIFICATIONS


- IRRIGATION SYSTEM DESIGN BASED ON 25 GPM AT 70 PSI.
- IRRIGATION DESIGN IS FROM THE POINT OF CONNECTION(POC)ONLY. THE DESIGN IS BASED ON GALLONS PER MINUTE(GPM)AND POUNDS PER SQUARE INCH(Psi)FURNISHED BY OTHERS.
- IRRIGATION CONTRACTOR IS TO VERIFY POINT OF CONNECTION IN THE FIELD. INSTALLER IS TO CONFIRM THE MINIMUM DISCHARGE REQUIREMENTS OF THE POINT OF CONNECTION AS INDICATED ON THE LEGEND PRIOR TO INSTALLATION.
- THE PRESSURE REQUIREMENT AT THE POINT OF CONNECTION IS BASED ON NO MORE THAN 5 FEET OF ELEVATION CHANGE IN THE AREAS OF IRRIGATION.
- ALL PRODUCTS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND ACCORDING TO LOCAL BUILDING, ELECTRICAL, AND PLUMBING CODES.
- IRRIGATION CONTRACTOR WILL ARRANGE INSPECTIONS REQUIRED BY LOCAL AGENCIES AND ORDINANCES DURING THE COURSE OF CONSTRUCTION AS REQUIRED. ALL WIRING TO BE PER LOCAL CODE. BACKFLOW PREVENTION TO BE PER LOCAL CO
- LOCATION OF IRRIGATION COMPONENTS SHOWN ON DRAWING IS APPROXIMATE. ACT PLACEMENT MAY VERY SLIGHTLY AS REQUIRED TO ACHIEVE FULL, EVEN COVERAGE.
- ALL SPRINKLER HEADS SHALL BE INSTALLED PERPENDICULAR TO FINISH GRADES. EXCEPT AS OTHERWISE INDICATED.
- INSTALL IRRIGATION MAINS WITH A MINIMUM 18" OF COVER BASED ON FINISH GRAD INSTALL IRRIGATION LATERALS WITH MINIMUM 12" OF COVER BASED ON FINISH GRAD
- PIPE LOCATIONS ARE DIAGRAMATIC. VALVES AND MAINLINE SHOWN IN PAVED AREA ARE FOR GRAPHIC CLARITY ONLY.
- THE IRRIGATION CONTRACTOR SHALL COMPLY WITH PIPE SIZES AS INDICATED.
- ALL WIRE SPLICES OR CONNECTIONS SHALL BE MADE WITH APPROVED WATERPROOF WIRE CONNECTIONS AND BE IN A VALVE OR SPLICE BOX.
- ALL CONTROLLER/DECODER WIRE SHALL BE THE SINGLE STRAND SPECIFIED BY THE CONTROLLER MANUFACTURER

VALVE SCHEDULE (SECOND FLOOR WEST ROOF DECK)

NUMBER	MODEL	SIZE	TYPE	GPM	WIRE	VALVE LOSS	PSI	PSI @ POC	PRECIP
B1	Rain Bird PGA Globe	1"	Shrub Spray	10.71	15.8	5.91	36.4	44.3	1.36 in/h
B2	Rain Bird PGA Globe	1"	Shrub Spray	12.29	20.1	5.92	36.7	45	1.29 in/h
	Common Wire				21.9				

WATERING SCHEDULE (SECOND FLOOR WEST ROOF DECK)

NUMBER	MODEL	TYPE	PRECIP	SUN	MON	TUE	WED	THU	FRI	SAT	IN./WEEK	MIN./WEEK	GAL./WEEK	GAL./DAY
B1	Rain Bird PGA Globe	Shrub Spray	1.36 in/h	7 min	7 min	7 min	7 min	7 min	7 min	7 min	1	45	482	68.9
B2	Rain Bird PGA Globe	Shrub Spray	1.29 in/h	7 min	7 min	7 min	7 min	7 min	7 min	7 min	1	47	578	82.5
	TOTALS:			14	14	14	14	14	14	14		92	1,060	151.4

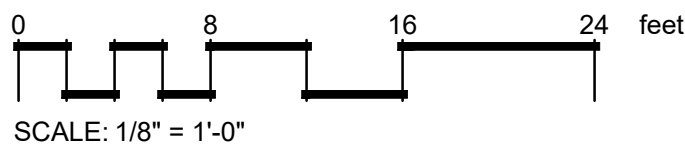

Project Name:

THE GRAND ON MAIN
WEST FIELD, INDIANA

Customer Name:

Design Date: 14-04-26

Drawn By: TOM

REVISIONS

Description	Date

Drawing Scale: 1" = 8'


Project Services Number: XXXX

Drawing Title:

IRRIGATION PLAN

Sheet Number:

IR-2

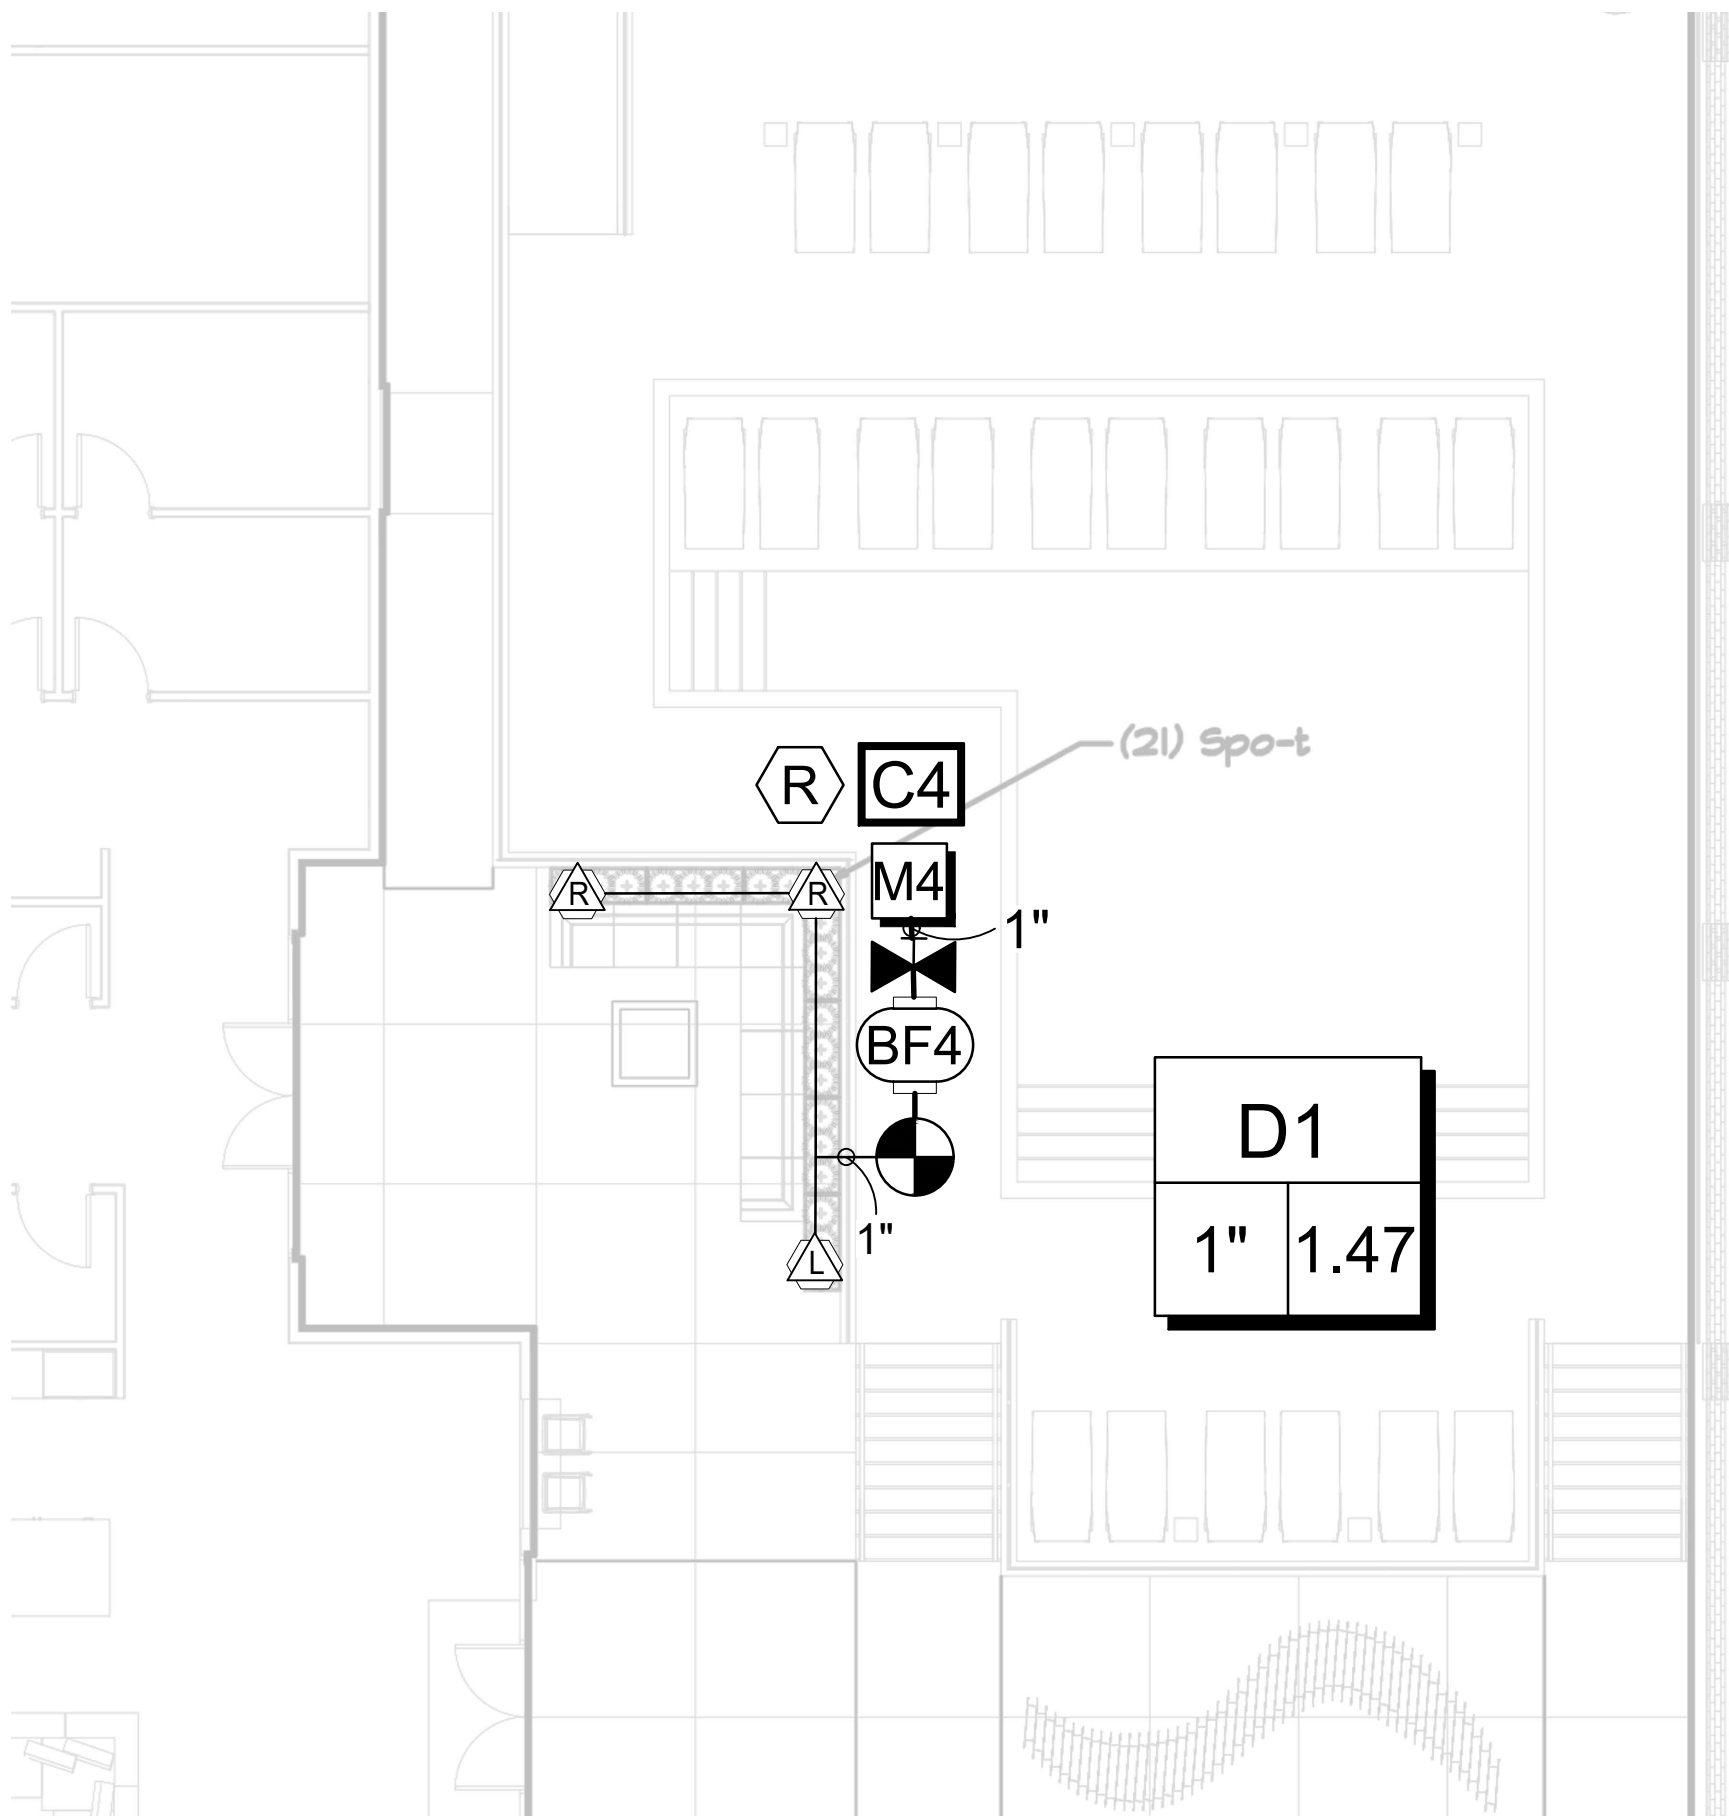


IRRIGATION SCHEDULE (SECOND FLOOR EAST ROOF DECK)

SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird 1812 15LCS	1
	Rain Bird 1812 15RCS	2
SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird PGA Globe 1"	1
	Nibco T-113 1"	1
	Febco 850 1"	1
	Rain Bird ESP4ME3	1
	Rain Bird WR2-RFC	1
	Water Meter 1"	1

———— Irrigation Lateral Line: PVC Class 200 SDR 21 1"

----- Irrigation Mainline: PVC Class 200 SDR 21 1"

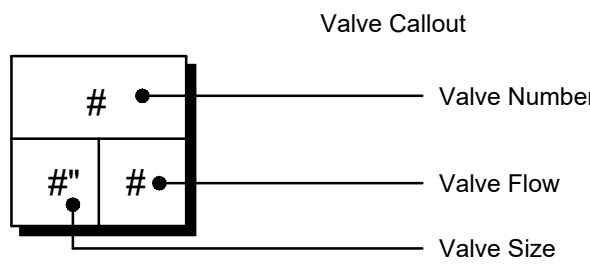

CRITICAL ANALYSIS

P.O.C. NUMBER: 01
Water Source Information:

FLOW AVAILABLE
Water Meter Size: 1"
Flow Available 37.5 GPM

PRESSURE AVAILABLE
Static Pressure at POC: 50 PSI
Elevation Change: 5.00 ft
Service Line Size: 2"
Length of Service Line: 20 ft
Pressure Available: 48 PSI

DESIGN ANALYSIS
Maximum Station Flow: 1.47 GPM
Flow Available at POC: 37.5 GPM
Residual Flow Available: 36.03 GPM

Design Pressure: 30 PSI
Friction Loss: 0 PSI
Fittings Loss: 0 PSI
Elevation Loss: 0 PSI
Loss through Valve: 5.15 PSI
Pressure Req. at Critical Station: 35.2 PSI
Loss for Fittings: 0.0 PSI
Loss for Main Line: 0.0 PSI
Loss for POC to Valve Elevation: 0 PSI
Loss for Backflow: 5 PSI
Loss for Water Meter: 0.2 PSI
Critical Station Pressure at POC: 40.4 PSI
Pressure Available: 48 PSI
Residual Pressure Available: 7.64 PSI

IRRIGATION SPECIFICATIONS


- IRRIGATION SYSTEM DESIGN BASED ON 25 GPM AT 70 PSI.
- IRRIGATION DESIGN IS FROM THE POINT OF CONNECTION(POC)ONLY. THE DESIGN IS BASED ON GALLONS PER MINUTE(GPM)AND POUNDS PER SQUARE INCH(Psi)FURNISHED BY OTHERS.
- IRRIGATION CONTRACTOR IS TO VERIFY POINT OF CONNECTION IN THE FIELD. INSTALLER IS TO CONFIRM THE MINIMUM DISCHARGE REQUIREMENTS OF THE POINT OF CONNECTION AS INDICATED ON THE LEGEND PRIOR TO INSTALLATION.
- THE PRESSURE REQUIREMENT AT THE POINT OF CONNECTION IS BASED ON NO MORE THAN 5 FEET OF ELEVATION CHANGE IN THE AREAS OF IRRIGATION.
- ALL PRODUCTS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND ACCORDING TO LOCAL BUILDING, ELECTRICAL, AND PLUMBING CODES.
- IRRIGATION CONTRACTOR WILL ARRANGE INSPECTIONS REQUIRED BY LOCAL AGENCIES AND ORDINANCES DURING THE COURSE OF CONSTRUCTION AS REQUIRED. ALL WIRING TO BE PER LOCAL CODE. BACKFLOW PREVENTION TO BE PER LOCAL CO
- LOCATION OF IRRIGATION COMPONENTS SHOWN ON DRAWING IS APPROXIMATE. ACT PLACEMENT MAY VERY SLIGHTLY AS REQUIRED TO ACHIEVE FULL, EVEN COVERAGE.
- ALL SPRINKLER HEADS SHALL BE INSTALLED PERPENDICULAR TO FINISH GRADES. EXCEPT AS OTHERWISE INDICATED.
- INSTALL IRRIGATION MAINS WITH A MINIMUM 18" OF COVER BASED ON FINISH GRAD INSTALL IRRIGATION LATERALS WITH MINIMUM 12" OF COVER BASED ON FINISH GRAD
- PIPE LOCATIONS ARE DIAGRAMATIC. VALVES AND MAINLINE SHOWN IN PAVED AREA ARE FOR GRAPHIC CLARITY ONLY.
- THE IRRIGATION CONTRACTOR SHALL COMPLY WITH PIPE SIZES AS INDICATED.
- ALL WIRE SPLICES OR CONNECTIONS SHALL BE MADE WITH APPROVED WATERPROOF WIRE CONNECTIONS AND BE IN A VALVE OR SPLICE BOX.
- ALL CONTROLLER/DECODER WIRE SHALL BE THE SINGLE STRAND SPECIFIED BY THE CONTROLLER MANUFACTURER.


VALVE SCHEDULE (SECOND FLOOR EAST ROOF DECK)

NUMBER	MODEL	SIZE	TYPE	GPM	WIRE	VALVE LOSS	PSI	PSI @ POC	PRECIP
D1	Rain Bird PGA Globe Common Wire	1"	Shrub Spray	1.47	17.1 11.5	5.15	35.2	40.4	1.2 in/h

WATERING SCHEDULE (SECOND FLOOR EAST ROOF DECK)


NUMBER	MODEL	TYPE	PRECIP	SUN	MON	TUE	WED	THU	FRI	SAT	IN./WEEK	MIN./WEEK	GAL./WEEK	GAL./DAY
D1	Rain Bird PGA Globe	Shrub Spray	1.2 in/h	8 min	8 min	8 min	8 min	8 min	8 min	8 min	1	51	75.0	10.7
TOTALS:				8	8	8	8	8	8	8		51	75.0	10.7

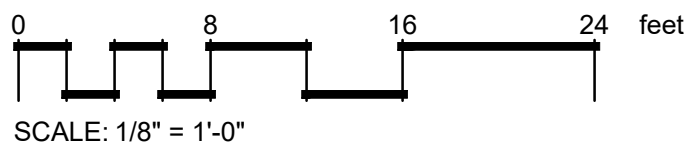

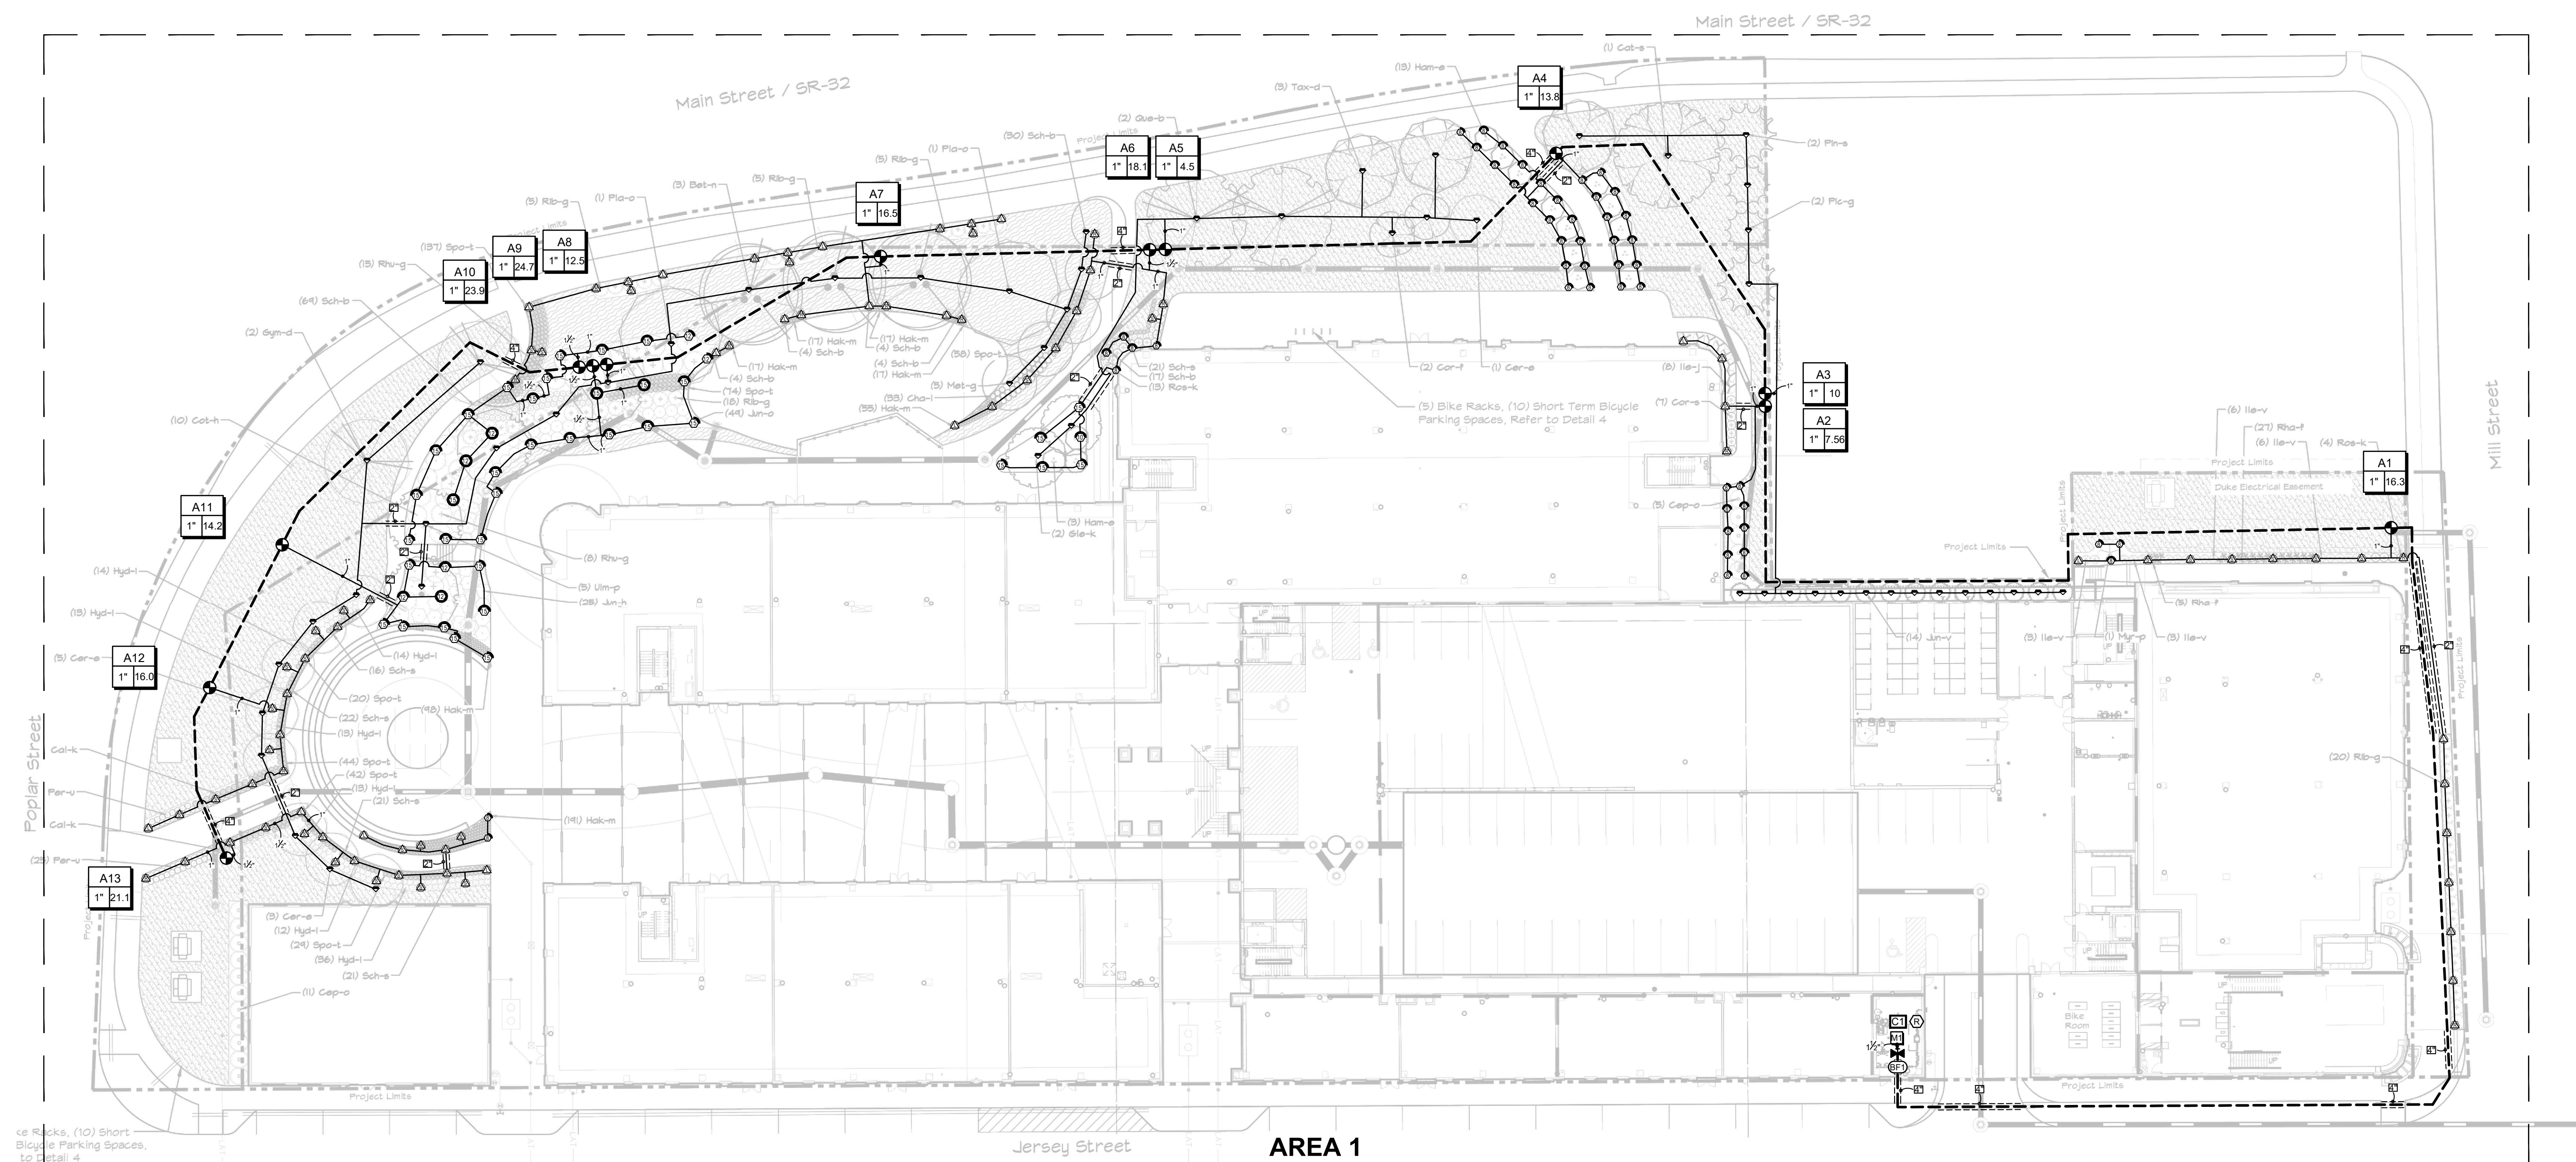

Project Name:

IRRIGATION SCHEDULE (AREA 1)

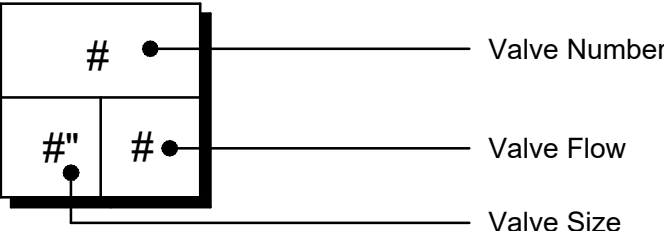SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird 1812 15LCS	16
	Rain Bird 1812 15RCS	17
	Rain Bird 1812 15SST	54
	Rain Bird 1812 08H	33
	Rain Bird 1812 08Q	17
	Rain Bird 1812 10H	1
	Rain Bird 1812 12F	3
	Rain Bird 1812 12H	2
	Rain Bird 1812 12Q	2
	Rain Bird 1812 15F	3
	Rain Bird 1812 15H	17
	Rain Bird 1812 15Q	16
	Rain Bird 1804-1400 Flood 1402	54
SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird PGA Globe 1"	13
	Nibco T-113 1 1/2"	1
	Febco 850 1"	1
	Rain Bird ESP4ME3 with (3) ESP-SM3	1
	Rain Bird WR2-RFC	1
	Water Meter 1"	1
Irrigation Lateral Line: PVC Class 200 SDR 21 1"		3,308 lf
Irrigation Lateral Line: PVC Class 200 SDR 21 1 1/2"		103.3 lf
Irrigation Mainline: PVC Class 200 SDR 21 1 1/2"		1,388 lf
Pipe Sleeve: PVC Schedule 40 2"		122.7 lf
Pipe Sleeve: PVC Schedule 40 4"		143.2 lf
Valve Callout		
		

VALVE SCHEDULE (AREA 1)

NUMBER	MODEL	SIZE	TYPE	GPM	WIRE	VALVE LOSS	PSI	PSI @ POC	PRECIP
A1	Rain Bird PGA Globe	1"	Shrub Spray	16.31	404.7	5.96	37.2	48.2	1.76 in/h
A2	Rain Bird PGA Globe	1"	Shrub Spray	7.56	683.5	5.7	35.8	43.2	1.33 in/h
A3	Rain Bird PGA Globe	1"	Bubbler	10	687.7	5.9	36.7	45.9	1.7 in/h
A4	Rain Bird PGA Globe	1"	Shrub Spray	13.78	811.1	5.94	36.2	47.9	1.29 in/h
A5	Rain Bird PGA Globe	1"	Bubbler	4.5	951.9	5.45	35.6	41.3	1.7 in/h
A6	Rain Bird PGA Globe	1"	Shrub Spray	18.06	957.0	5.98	37.0	53.1	1.37 in/h
A7	Rain Bird PGA Globe	1"	Shrub Spray	16.54	1,046	5.97	37.4	52.7	1.51 in/h
A8	Rain Bird PGA Globe	1"	Bubbler	12.5	1,145	5.93	36.9	49.1	1.7 in/h
A9	Rain Bird PGA Globe	1"	Shrub Spray	24.74	1,149	6.19	36.8	63.7	0.97 in/h
A10	Rain Bird PGA Globe	1"	Shrub Spray	23.87	1,154	6.15	37.7	63.3	1.0 in/h
A11	Rain Bird PGA Globe	1"	Shrub Spray	14.19	1,283	5.94	37.4	51.6	1.52 in/h
A12	Rain Bird PGA Globe	1"	Shrub Spray	15.99	1,336	5.96	37.1	53.5	1.98 in/h
A13	Rain Bird PGA Globe	1"	Shrub Spray	21.12	1,395	6.04	37.6	61.5	1.77 in/h
Common Wire					1,388				

WATERING SCHEDULE (AREA 1)

NUMBER	MODEL	TYPE	PRECIP	SUN	MON	TUE	WED	THU	FRI	SAT	IN./WEEK	MIN./WEEK	GAL./WEEK	GAL./DAY
A1	Rain Bird PGA Globe	Shrub Spray	1.76 in/h	5 min	5 min	5 min	5 min	5 min	5 min	5 min	1	35	571	81.6
A2	Rain Bird PGA Globe	Shrub Spray	1.33 in/h	7 min	7 min	7 min	7 min	7 min	7 min	7 min	1	45	340	48.6
A3	Rain Bird PGA Globe	Bubbler	1.7 in/h	6 min	6 min	6 min	6 min	6 min	6 min	6 min	1	36	360	51.4
A4	Rain Bird PGA Globe	Shrub Spray	1.29 in/h	7 min	7 min	7 min	7 min	7 min	7 min	7 min	1	47	648	92.5
A5	Rain Bird PGA Globe	Bubbler	1.7 in/h	6 min	6 min	6 min	6 min	6 min	6 min	6 min	1	36	162	23.1
A6	Rain Bird PGA Globe	Shrub Spray	1.37 in/h	7 min	7 min	7 min	7 min	7 min	7 min	7 min	1	44	795	114
A7	Rain Bird PGA Globe	Shrub Spray	1.51 in/h	6 min	6 min	6 min	6 min	6 min	6 min	6 min	1	40	662	94.5
A8	Rain Bird PGA Globe	Bubbler	1.7 in/h	6 min	6 min	6 min	6 min	6 min	6 min	6 min	1	36	450	64.3
A9	Rain Bird PGA Globe	Shrub Spray	0.97 in/h	9 min	9 min	9 min	9 min	9 min	9 min	9 min	1	62	1,534	219
A10	Rain Bird PGA Globe	Shrub Spray	1.0 in/h	9 min	9 min	9 min	9 min	9 min	9 min	9 min	1	60	1,432	205
A11	Rain Bird PGA Globe	Shrub Spray	1.52 in/h	6 min	6 min	6 min	6 min	6 min	6 min	6 min	1	40	568	81.1
A12	Rain Bird PGA Globe	Shrub Spray	1.98 in/h	5 min	5 min	5 min	5 min	5 min	5 min	5 min	1	31	496	70.8
A13	Rain Bird PGA Globe	Shrub Spray	1.77 in/h	5 min	5 min	5 min	5 min	5 min	5 min	5 min	1	34	718	103
TOTALS:				84	84	84	84	84	84	84		546	8,734	1,248

CRITICAL ANALYSIS

P.O.C. NUMBER: 01
Water Source Information:

FLOW AVAILABLE
Water Meter Size: 1"
Flow Available 37.5 GPM

PRESSURE AVAILABLE
Static Pressure at POC: 70 PSI
Elevation Change: 5.00 ft
Service Line Size: 2"
Length of Service Line: 20 ft
Pressure Available: 68 PSI

DESIGN ANALYSIS
Maximum Station Flow: 24.74 GPM
Flow Available at POC: 37.5 GPM
Residual Flow Available: 12.76 GPM

Design Pressure: 30 PSI
Friction Loss: 0.55 PSI
Fittings Loss: 0.06 PSI
Elevation Loss: 0 PSI
Loss through Valve: 6.19 PSI
Pressure Req. at Critical Station: 36.8 PSI
Loss for Fittings: 1.4 PSI
Loss for Main Line: 14.0 PSI
Loss for POC to Valve Elevation: 0 PSI
Loss for Backflow: 7.86 PSI
Loss for Water Meter: 3.62 PSI
Critical Station Pressure at POC: 63.7 PSI
Pressure Available: 68 PSI
Residual Pressure Available: 4.32 PSI

IRRIGATION SPECIFICATIONS

- IRRIGATION SYSTEM DESIGN BASED ON 25 GPM AT 70 PSI.
- IRRIGATION DESIGN IS FROM THE POINT OF CONNECTION(POC)ONLY. THE DESIGN IS BASED ON GALLONS PER MINUTE(GPM)AND POUNDS PER SQUARE INCH(Psi)FURNISHED BY OTHERS.
- IRRIGATION CONTRACTOR IS TO VERIFY POINT OF CONNECTION IN THE FIELD. INSTALLER IS TO CONFIRM THE MINIMUM DISCHARGE REQUIREMENTS OF THE POINT OF CONNECTION AS INDICATED ON THE LEGEND PRIOR TO INSTALLATION.
- THE PRESSURE REQUIREMENT AT THE POINT OF CONNECTION IS BASED ON NO MORE THAN 5 FEET OF ELEVATION CHANGE IN THE AREAS OF IRRIGATION.
- ALL PRODUCTS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER’S RECOMMENDATIONS AND ACCORDING TO LOCAL BUILDING, ELECTRICAL, AND PLUMBING CODES.
- IRRIGATION CONTRACTOR WILL ARRANGE INSPECTIONS REQUIRED BY LOCAL AGENCIES AND ORDINANCES DURING THE COURSE OF CONSTRUCTION AS REQUIRED. ALL WIRING TO BE PER LOCAL CODE. BACKFLOW PREVENTION TO BE PER LOCAL CO
- LOCATION OF IRRIGATION COMPONENTS SHOWN ON DRAWING IS APPROXIMATE. ACT PLACEMENT MAY VERY SLIGHTLY AS REQUIRED TO ACHIEVE FULL, EVEN COVERAGE.
- ALL SPRINKLER HEADS SHALL BE INSTALLED PERPENDICULAR TO FINISH GRADES. EXCEPT AS OTHERWISE INDICATED.
- INSTALL IRRIGATION MAINS WITH A MINIMUM 18” OF COVER BASED ON FINISH GRAD INSTALL IRRIGATION LATERALS WITH MINIMUM 12” OF COVER BASED ON FINISH GRAD
- PIPE LOCATIONS ARE DIAGRAMATIC. VALVES AND MAINLINE SHOWN IN PAVED AREA ARE FOR GRAPHIC CLARITY ONLY.
- THE IRRIGATION CONTRACTOR SHALL COMPLY WITH PIPE SIZES AS INDICATED.
- ALL WIRE SPLICES OR CONNECTIONS SHALL BE MADE WITH APPROVED WATERPROOF WIRE CONNECTIONS AND BE IN A VALVE OR SPLICE BOX.
- ALL CONTROLLER/DECODER WIRE SHALL BE THE SINGLE STRAND SPECIFIED BY THE CONTROLLER MANUFACTURER.

Project Name:
THE GRAND ON MAIN
WEST FIELD, INDIANA

Customer Name:

Design Date: 14-04-26

Drawn By: TOM


REVISIONS	
Description	Date
	
	
	
	

Drawing Scale: N.T.S


Project Services Number: XXXX

Drawing Title:
IRRIGATION DETAIL SHEET


Sheet Number:
IR-5

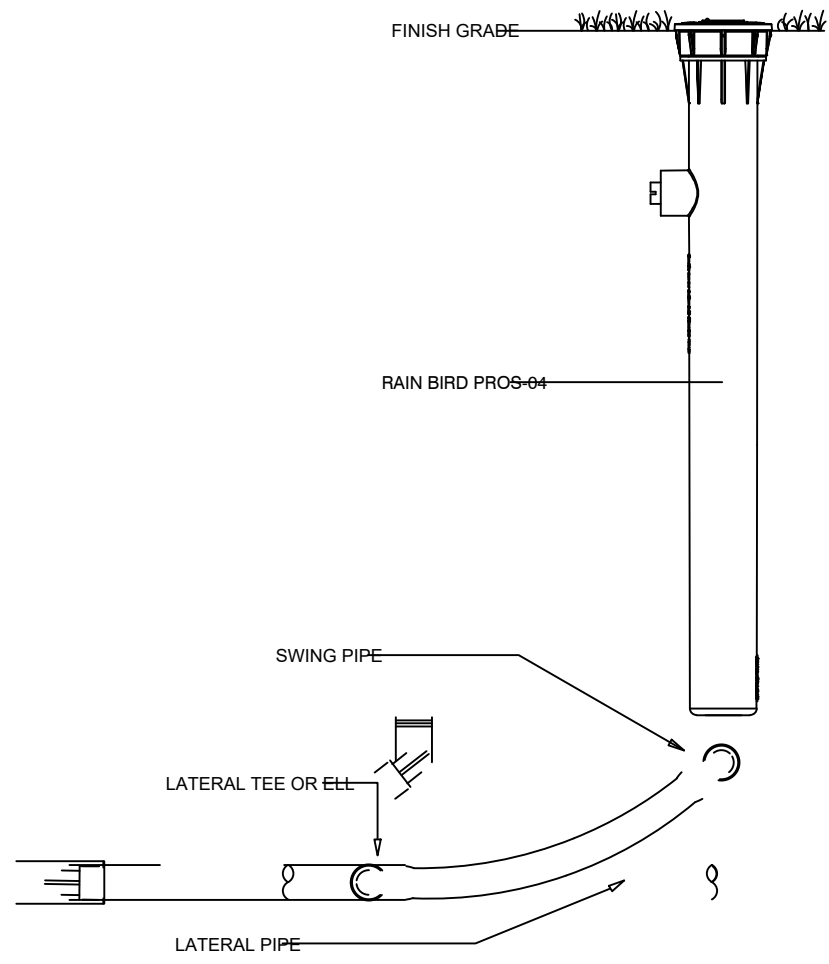


1 POP-UP SPRAY SPRINKLER

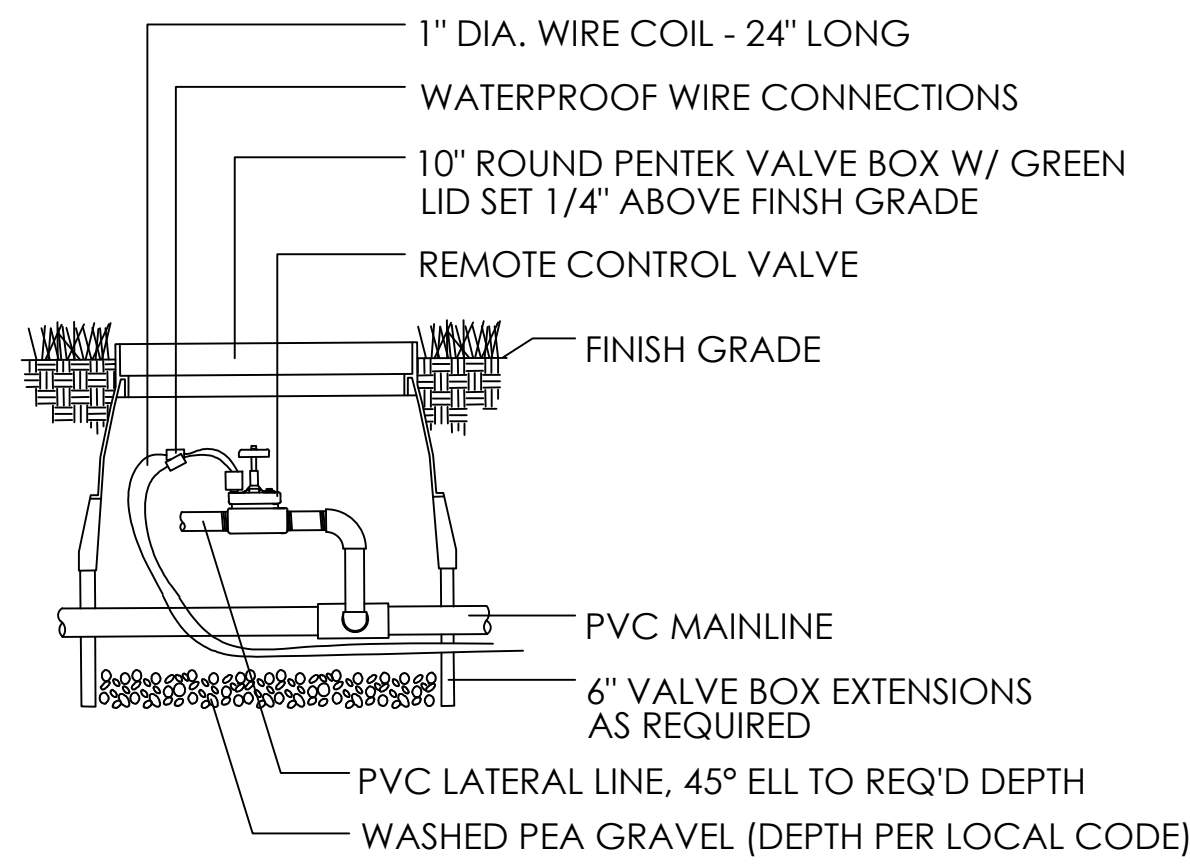


2 REMOTE CONTROL VALVE

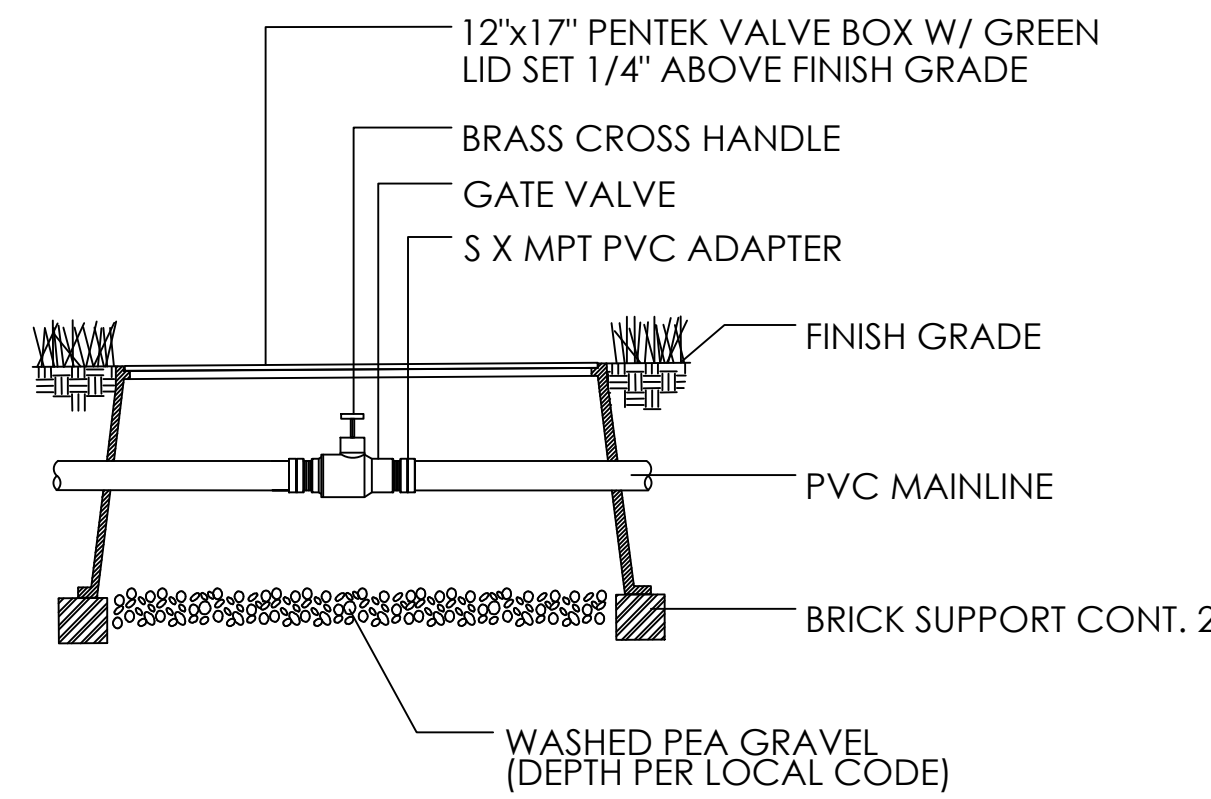


3 ISOLATION VALVE

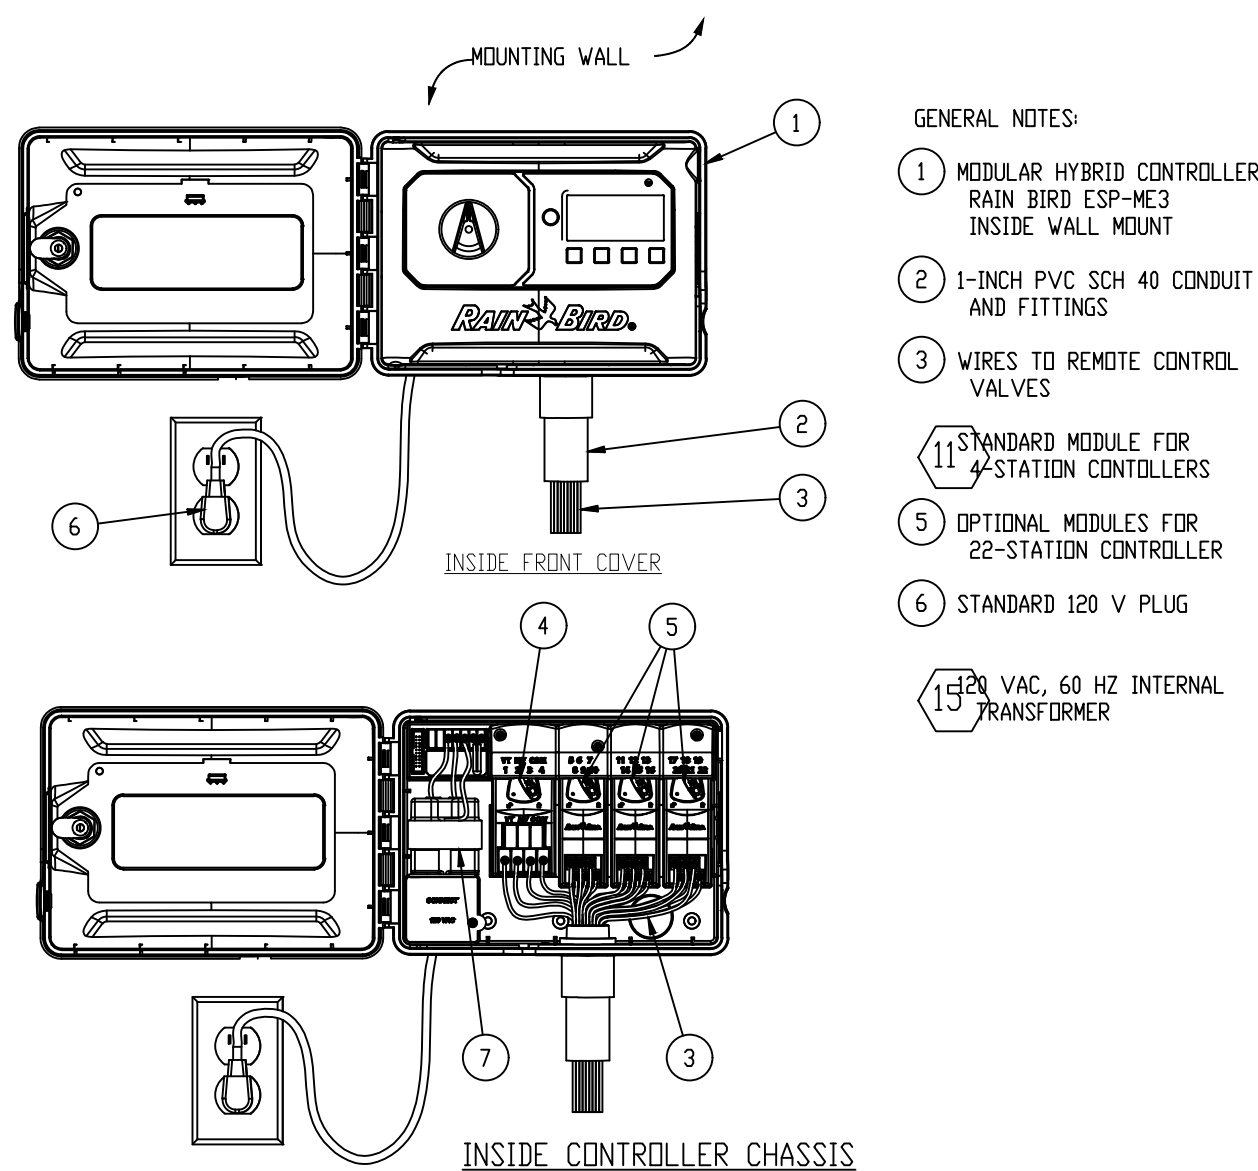

4 ESP-ME3 MODULAR HYBRID CONTROLLER

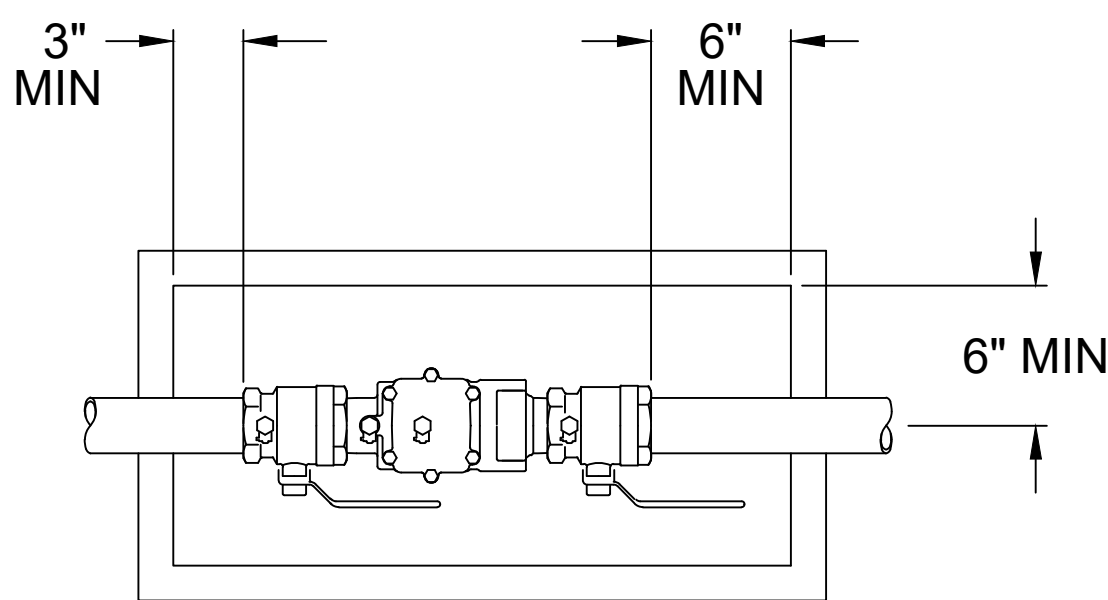

5 DOUBLE CHECK BACKFLOW PREVENTER

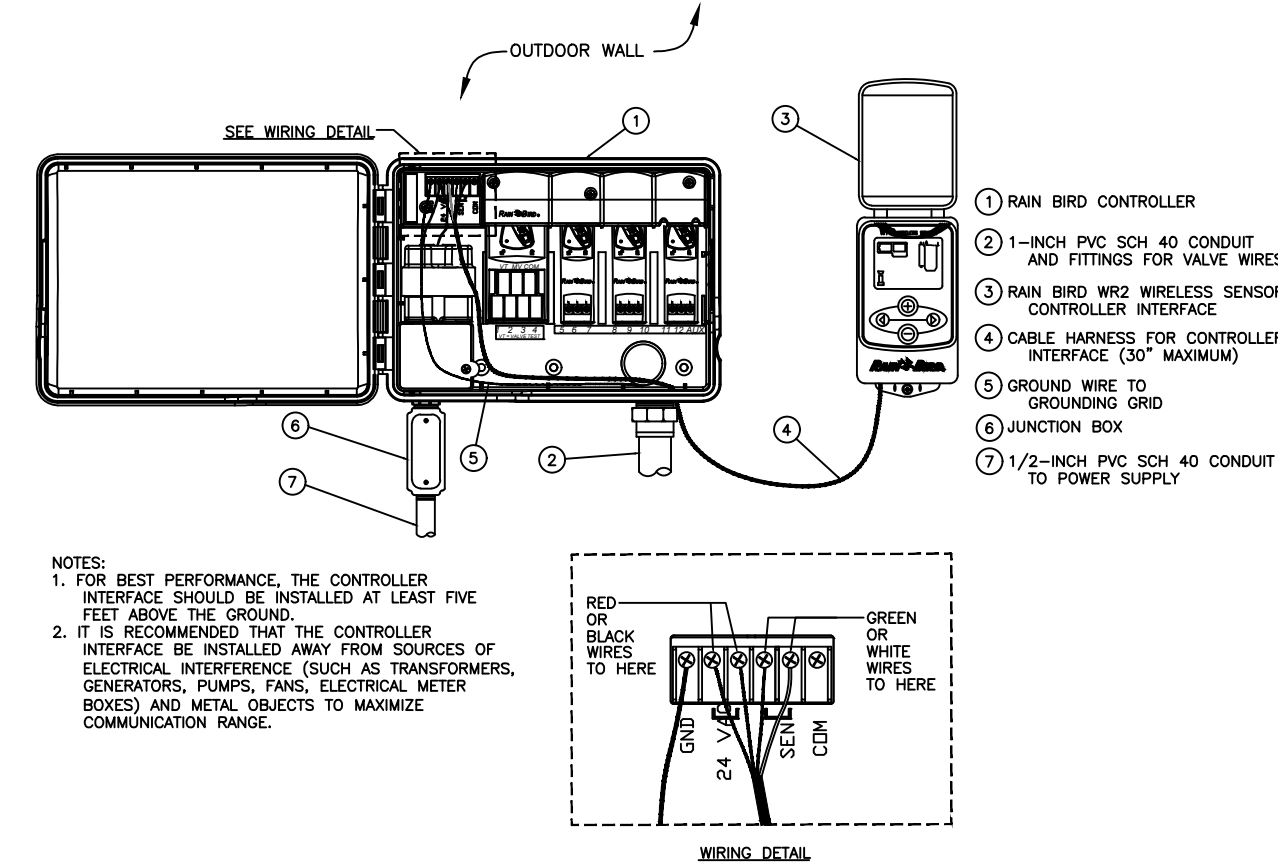

6 WR2 WIRELESS RAIN SENSOR

Project Name:

THE GRAND ON MAIN
WEST FIELD, INDIANA

Customer Name:

Design Date: 14-04-26

Drawn By: TOM

REVISIONS	
Description	Date
△	
△	
△	
△	

Drawing Scale: N.T.S

Project Services Number: XXXX

Drawing Title:

IRRIGATION DETAIL SHEET

Sheet Number:

IR-6